

T02000000601

(Requestor's Name)

(Address)

(Address)

(City/State/Zip/Phone #)

☐ PICK-UP

☐ WAIT

☐ MAIL

(Business Entity Name)

(Document Number)

Certified Copies \_\_\_\_\_ Certificates of Status \_\_\_\_\_

Instructions to Filing Officer:




900224856289  
RENEWAL

03/23/12--01015--003 \*\*96.25

T02-601

FILED  
12 MAR 23 AM 11:04  
SECRETARY OF STATE  
TALLAHASSEE, FLORIDA

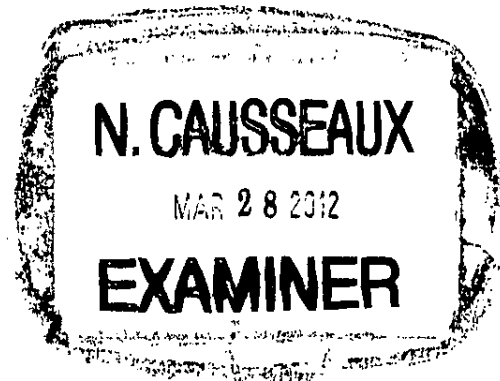

Florida Department of State, Kurt S. Browning, Secretary of State  
MARK RENEWAL APPLICATION

December 2, 2011

REX CHEMICAL CORPORATION, A FLA. CORP.  
2270 N.W. 23 STREET  
MIAMI, FL 33142

FILED  
12 MAR 23 AM 11:04  
SECRETARY OF STATE  
TALLAHASSEE, FLORIDA

- 1) Mark Registered: U.S.A. UNDERCOATER SEALER & DESIGN OF STARS
- 2) Registration Number: T02000000601
- 3) Date Filed: 05/30/2002 4) Renewal Date: 05/30/2012
- 5) Class(es): 1-0003

Renewal Statement Pursuant to Section 495.071, Florida Statutes : (Below you must state the mark is still in use within the state of Florida or the reason for its nonuse.)

MARK IS STILL IN USE IN THE STATE OF FLORIDA

If applicant is a corporation, enter state of incorporation: FLORIDA

I, Betty Granja, being sworn, depose and say that I am the owner or that I am authorized to sign on behalf of the owner of the trademark and/or service mark referenced herein and make this application and verification on my/the owner's behalf. I further acknowledge that I have read the application and know the contents thereof and that the facts stated herein are true and correct.

BETTY GRANJA

Typed or Printed Name of Owner


Signed

[Signature]  
Owner's Signature or Authorized Person's Signature

Subscribed and sworn to before me this 19<sup>th</sup> day of March, 2012.

[Signature]  
Signature of Notary Public

(Notary Seal)  
My commission expires: \_\_\_\_\_

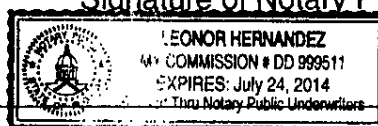

See reverse side for instructions.

CR2E005 (7-91)

USA UNDERCOATER SEALER is a combination of crystal clear, emulsified, synthetic resins highly concentrated to provide one coat of sealing properties. The ideal undercoater for subsequent coats of wax or polymer floor finishes.

**ADVANTAGES:**

Fills crevices and seals pores in floors forming an excellent foundation for floor polish. Primes floors before applying floor finish. Clear film enhances original floor colors. Dries rapidly and can be coated over in 30 minutes. Produces base to complement gloss of floor finish.

**DIRECTIONS:**

**FLOOR PREPARATION:** Remove old floor finish. Strip floor using a stripper with a 175RPM floor machine and a black pad. After floor has been stripped and completely rinsed, let dry. Be sure no alkaline residue remains on floor. Use a neutralizer/rinse solution if alkaline residue remains.

**APPLICATION:** Use a waxer mop or rayon mop. Apply thin coats for best results. Use 2 thin coats, allowing to dry between coats.

**DRYING TIME:** 30 minutes to 1 hour.  
**COVERAGE:** 1,200 to 1,800 sq.ft. per Gallon.

**NOTE:** As some brands of vinyl tile may cause this product to remain tacky, apply only to a few tiles and allow to dry. If tacky or not completely hard when dry, do not use on this tile.

**DO NOT POUR UNUSED MATERIAL BACK INTO ORIGINAL CONTAINER.**



# UNDERCOATER SEALER

**PENETRATING ACRYLIC SEALER PRIMER**  
AN UNDERCOATER FOR ALL COMPOSITION  
FLOORS: ASPHALT, VINYL, RUBBER, LINOLEUM,  
TERRAZZO AND CONCRETE.

**CAUTION: KEEP OUT OF REACH OF CHILDREN**  
(MANTENGALO FUERA DEL ALCANCE DE LOS NIÑOS)

**DO NOT MIX WITH ANY OTHER CHEMICALS**  
(NO MEZCLAR CON OTROS PRODUCTOS QUIMICOS)

**CAUTION:**

Causes skin and eye irritation. Inhalation may cause respiratory track irritation. Use product in well ventilated area and use exhaust fans. Wash your hands with soap and water at the end of the job.

**FIRSTAID:**

**EYE & SKIN:** Flush affected area immediately with plenty of water for at least 15 minutes. If any symptoms persist, seek medical attention immediately.

**INHALATION:** Move person to fresh air, if the symptoms persist seek medical attention.

**INGESTION:** If swallow do not induce vomiting. Drink plenty of water and seek medical attention immediately.


**FOR MORE INFORMATION READ MSDS.**

All floors are slippery when wet. To prevent fall exercise care when working and block traffic with "WET FLOOR" signs until floors are completely dry.

**HMS HAZARD RATING**


|                     |   |              |
|---------------------|---|--------------|
| HEALTH              | 1 | 0 - LEAST    |
| FLAMMABILITY        | 0 | 1 - SLIGHT   |
| REACTIVITY          | 0 | 2 - MODERATE |
| PERSONAL PROTECTION | A | 3 - HIGH     |
|                     |   | 4 - EXTREME  |

\*U.S.

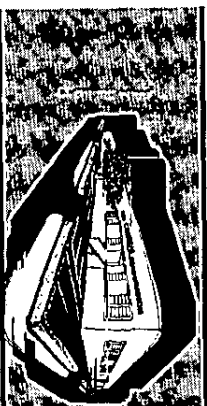

2270 N.W. 23rd Street  
Miami, Florida 33142  
TOLL FREE: 1-877-534-5539  
HTTP://www.rexchemical.com

DADE: (305) 634-2471  
BROWARD: (954) 561-0448  
FAK: (305) 634-5546  
EMAIL: rexchem@bellsouth.net



OFFICIAL SPECIMEN

1-800-800-0090